

Wheel Fitment Guide Instructions:

- 2012-2015 Honda Civic Si
- 2016+ Honda Civic Si & Base
- 2018-2022 Honda Accord

- 1) Print copy of drawing: Set page scaling to "Actual Size" or "1:1".


- 2) Verify Dimensions: Using a ruler, verify the horizontal red line is 105.5mm in width. Then, verify the vertical red line is 230.4mm in length. If print does not match, correct print scaling.

- 3) Glue printed copy to a more rigid paper such as a manila folder or thin cardboard.

- 4) Cut along the thick outline shown to the right.
 Note: the wheel hub bore size may be different than shown.
 Measure cut correct hub bore size.
 OR
 Align wheel hub bore with the centerline shown on cutout.

- 5) Lay edge of cutout template on inside surface of wheel hub as shown.

- 6) While holding the cutout template vertical on end, rotate around wheel radius.
 Verify that the edge of the cutout template has 4mm+ clearance to hub, spokes, and barrel of the wheel.

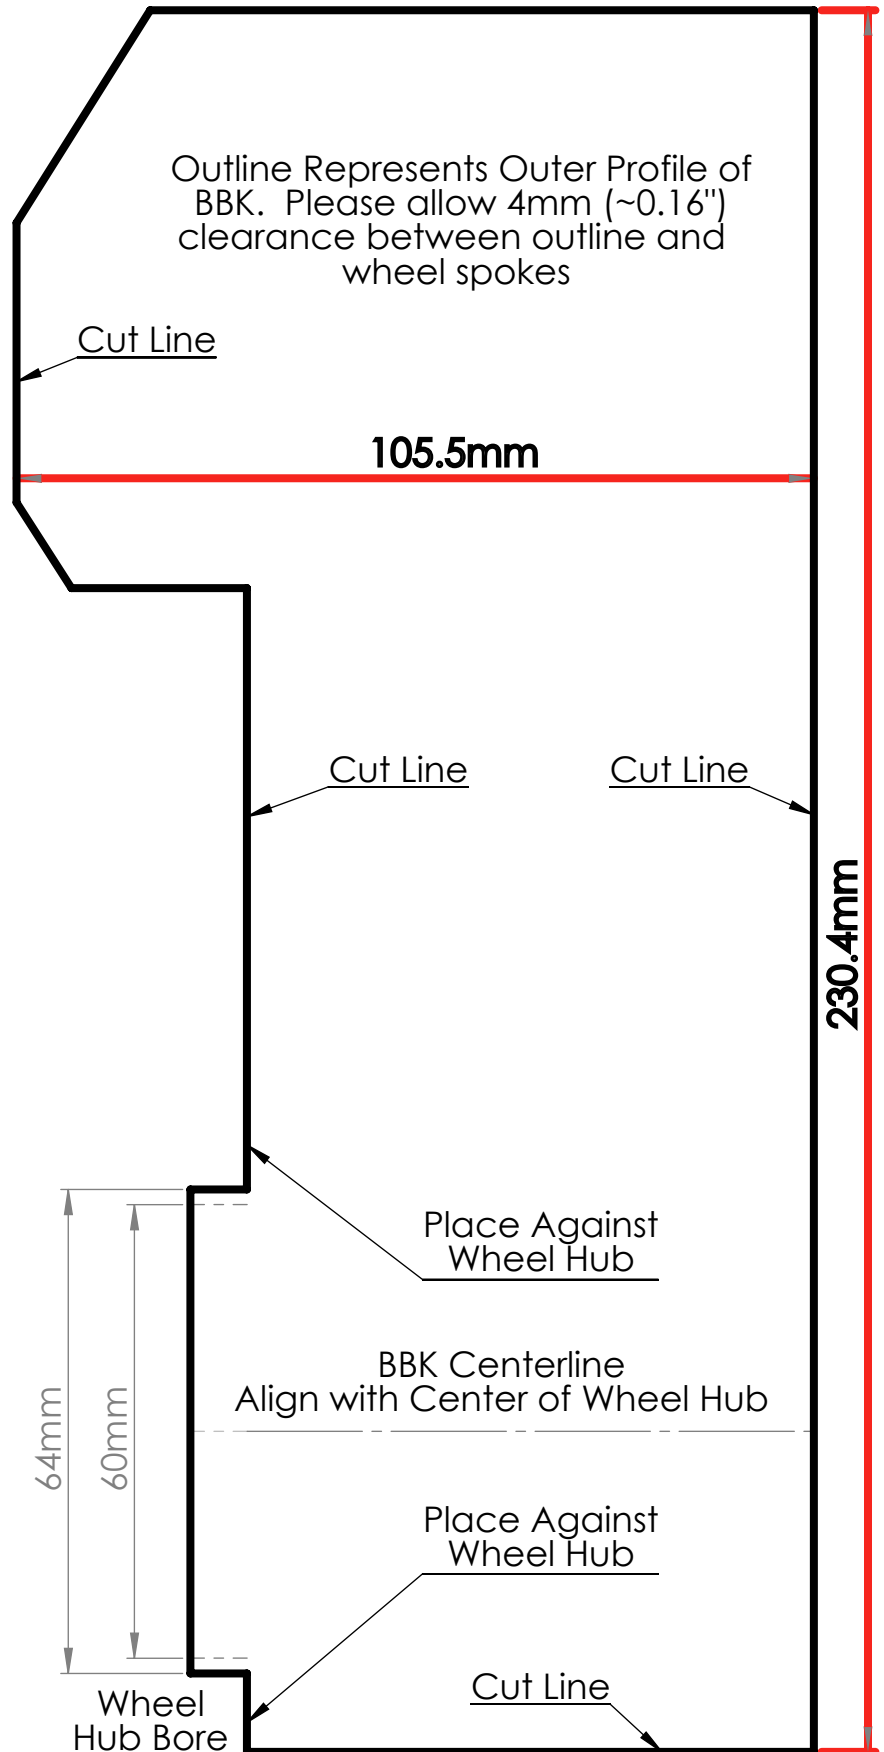

Check BBK Template Fitment on Wheel:

- Place the template vertically against the wheel hub.
- Center template on hub center as shown.
- Check clearance between template and wheel.
- Verify there is 4mm+ clearance between wheel and template.
- If there is contact or insufficient clearance, use spare nuts and washers stacked on the wheel hub to determine the clearance needed.
- Measure the height of the nuts and/or washers used to determine the spacer thickness needed.
- Once the spacer is obtained, check template fitment again with spacer installed on the wheel. Check out our [YouTube tutorial video](#) on using this template

