


**Wheel Fitment Guide Instructions:**  
2016+ Honda Civic Si & Base

- 1) Print copy of drawing: Set page scaling to "Actual Size" or "1:1".
- 2) Verify Dimensions: Using a ruler, verify the red 105.5mm width verify the red 230.4mm length if print does not match, correct print scaling.
- 3) Glue printed copy to a more rigid paper such as a manila folder or thin cardboard.
- 4) Cut along the thick outline shown to the right.  
Note: the wheel hub bore size may be different than shown.  
Measure cut correct hub bore size.  
OR  
Align wheel hub bore with the centerline shown on cutout.
- 5) Lay edge of cutout template on inside surface of wheel hub as shown.
- 6) While holding the cutout template vertical on end, rotate around wheel radius.  
Verify that the edge of the cutout template has 2mm+ clearance to hub, spokes, and barrel of the wheel.

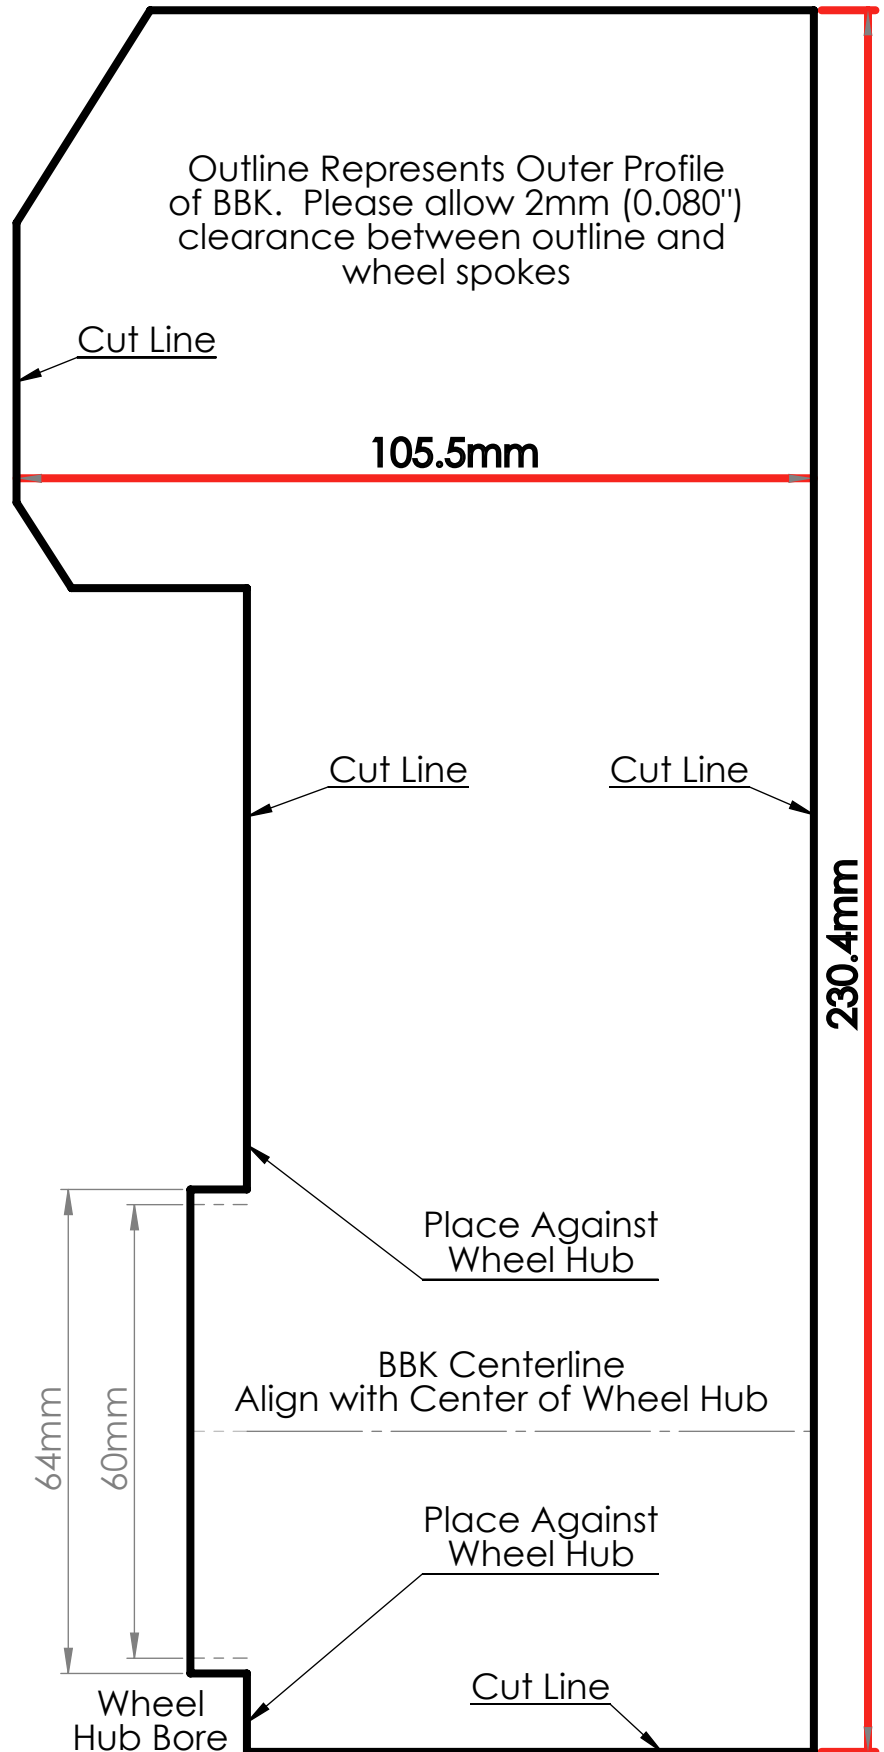

## Check BBK Template Fitment on Wheel:

- Place the template vertically against the wheel hub.
- Center template on hub center as shown.
- Check clearance between template and wheel at location of red arrows.
  - Verify there is 2mm+ clearance between wheel and template at location of red arrows.
- If there is contact or insufficient clearance, determine the needed spacer and source.
  - Check template fitment again with spacer installed on wheel.

