

## Wheel Fitment Guide

### Instructions:

**2017-2021 Honda Civic Type R FK8**


**2023+ Honda Civic Type R FL5**

**2024+ Acura Integra Type S DE5**

- 1) Print copy of drawing: Set page scaling to "Actual Size" or "1:1".
- 2) Verify dimensions: using a ruler, verify the horizontal red line is 103.5mm in width. Then, verify the vertical red line is 235mm in length. If print does not match, correct print scaling
- 3) Glue printed copy to a more rigid paper such as a manila folder or thin cardboard.
- 4) Cut along the thick black outline shown to the right.
- 5) Lay edge of cutout template on inside surface of wheel hub as shown
- 6) While holding the cutout template vertical and on end, rotate around wheel radius. Verify that the edge of the cutout has 4mm+ clearance to hub, spokes, and barrel of wheel

Note: the wheel hub bore size may be slightly different than shown.

Align wheel hub bore with the centerline shown on cutout.

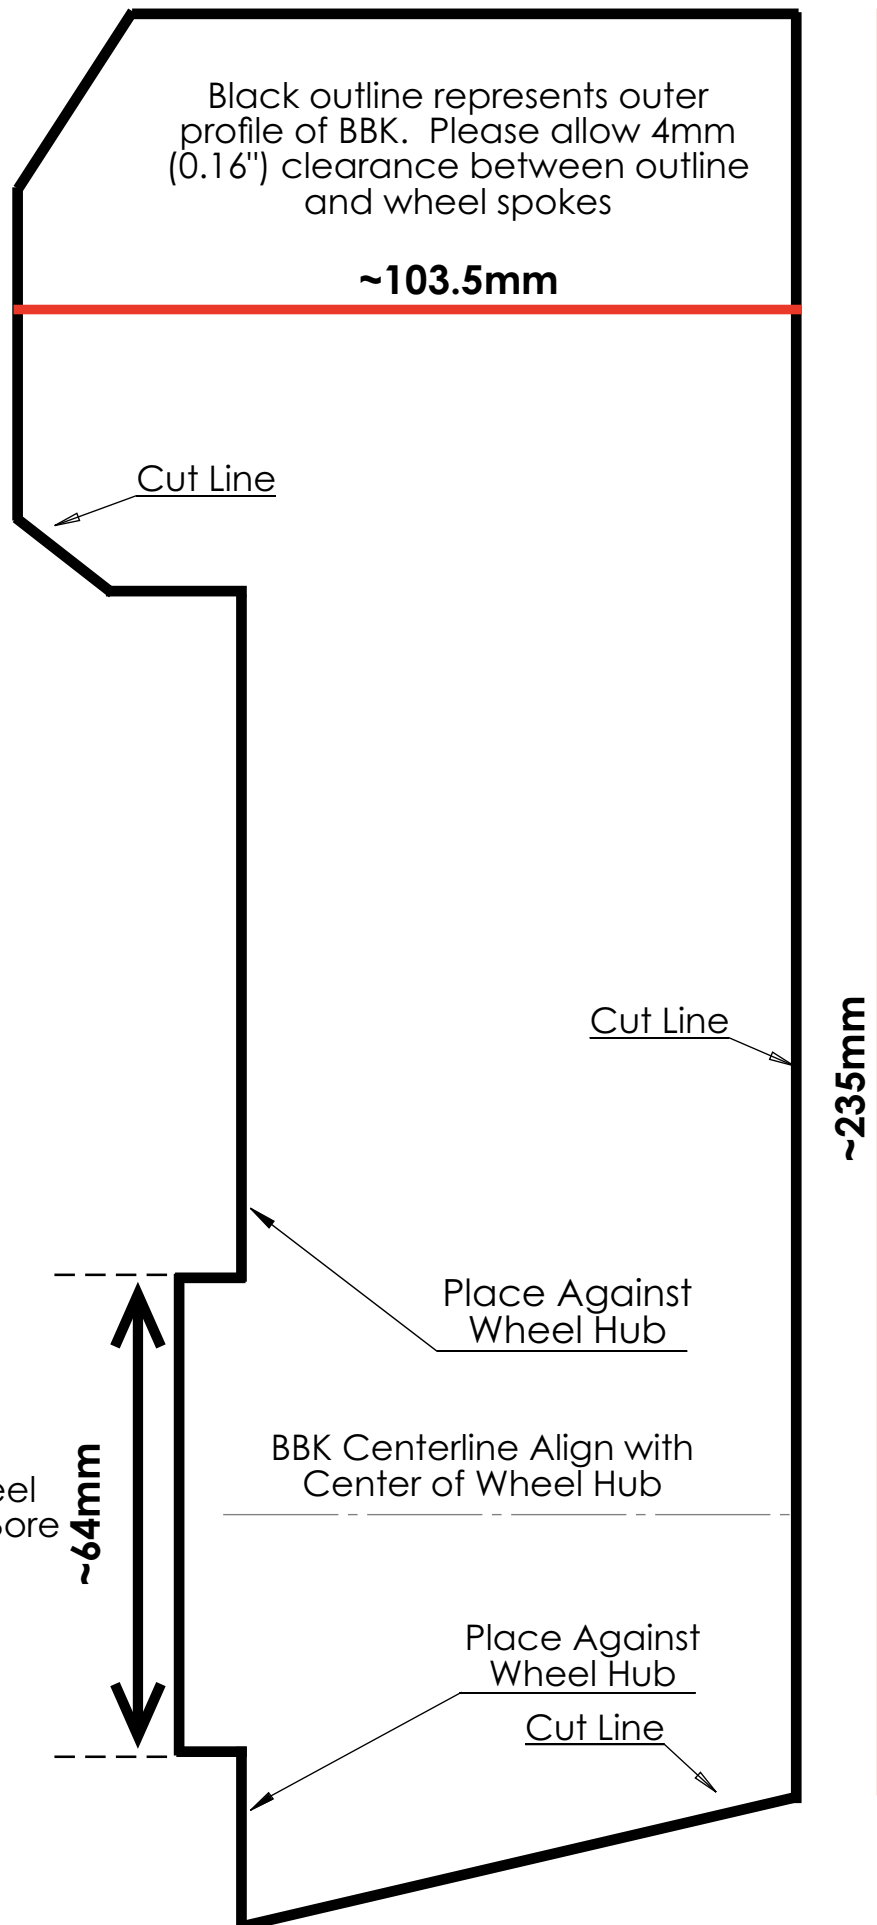



### Check BBK Template Fitment on Wheel:

- Place the template vertically against the wheel hub.
- Center template on hub center as shown.
- Check clearance between template and wheel.
- Verify there is 4mm+ clearance between wheel and template.
- If there is contact or insufficient clearance, use spare nuts and washers stacked on the wheel hub to determine the clearance needed.
- Measure the height of the nuts and/or washers used to determine the spacer thickness needed.
- Once the spacer is obtained, check template fitment again with spacer installed on the wheel.

